










- Ultra slim
- Universal AC input / Full range
- · 2 pole USA plug, Class II power unit
- No load power consumption <0.075W for 5~7.5V <0.15W for 9 ~48V
- ullet Energy efficiency Level ${
 m VI}$
- · Comply with EISA 2007/DoE
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- · Pass LPS
- · LED indicator for power on
- 54V model available for PoE(optional)
- Various DC plug quick adapter accessory available (Plug kit sold sperately, please refer to: https://www.meanwell.com/upload/pdf/DC_plug.pdf)
- · 3 years warranty

Description

SGA60U is a 60W ultra slim wall-mounted style single-output green adaptor series, which is compact and convenient for carry. SGA60U is a class II power unit (no FG) equipped with the standard 2-Pin U.S. plug, accepting the input range from 90VAC to 264VAC. The whole series provides different models with output voltages ranging between 5VDC and 48VDC that it can satisfy the demands for various types of consumer electronic devices.

With the efficiency up to 89.5% and the extremely low no-load power consumption below 0.075W for 5~7.5V, below 0.15W for 9 ~48V, SGA60U is compliant with the latest U.S. energy regulation EISA 2007/DoE(Level VI). The supreme feature allows the adaptor to save the energy when it is under either the operating mode or the standby mode. The entire series is approved for international safety regulations; moreover, it adopts the 94V-0 flame retardant plastic case that it can effectively prevent users from electric hazards.

Model Encoding

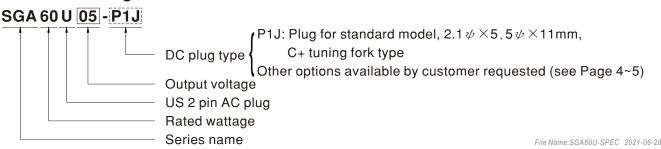














Applications

- · Consumer electronic devices
- Telecommunication devices
- · Office facilities
- Industrial equipments
- Power sourcing equipment of PoE

SPECIFICATION

ORDER NO.		SGA60U05-P1J	SGA60U07-P1J	SGA60U09-P1J	SGA60U12-P1J	SGA60U15-P1J	SGA60U18-P1	J SGA60U24-P1J	SGA60U48-P1					
	SAFETY MODEL NO.	SGA60U05	SGA60U07	SGA60U09	SGA60U12	SGA60U15	SGA60U18	SGA60U24	SGA60U48					
	DC VOLTAGE Note.2	EV	7.5V	9V	12V	15V	18V	24V	48V					
	RATED CURRENT	6A	6A	5.5A	5A	4A	3.33A	2.5A	1.25A					
	CURRENT RANGE	0 ~ 6A	0 ~ 6A	0 ~ 5.5A	0 ~ 5A	0 ~ 4A	0 ~ 3.33A	0 ~ 2.5A	0 ~ 1.25A					
	RATED POWER (max.)	30W	45W	50W	60W	60W	60W	60W	60W					
OUTPUT	RIPPLE & NOISE (max.) Note.3	80mVp-p	80mVp-p	80mVp-p	80mVp-p	80mVp-p	80mVp-p	100mVp-p	120mVp-p					
	VOLTAGE TOLERANCE Note.4	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±2.0%	±2.0%	±2.0%					
	LINE REGULATION Note.5	±1.0%	$\pm 1.0\%$	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%					
	LOAD REGULATION Note.6	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±2.0%	±2.0%	±2.0%					
	SETUP, RISE, HOLD UP TIME	2500ms, 50ms,	10ms/230VAC	2500ms, 50r	ms, 10ms/115VA	C at full load								
		90 ~ 264VAC												
	FREQUENCY RANGE	47 ~ 63Hz												
INPUT	EFFICIENCY (Typ.)	83.5%	85%	86.5%	87.5%	87%	88%	88%	89.5%					
INFUI	AC CURRENT	1.5A / 115VAC	0.75A / 230\	VAC										
	INRUSH CURRENT (max.)	Cold start 40A	/ 115VAC 8	0A / 230VAC										
	LEAKAGE CURRENT(max.)	0.25mA / 240VA												
	OVERLOAD		ed output power											
PROTECTION		71	<u> </u>		atically after fau	ult condition is re	emoved							
	OVER VOLTAGE		ed output voltage	er diode, output	-1									
	WORKING TEMP.				SHOLL									
	WORKING HUMIDITY		-20 ~ +50°C (Refer to "Derating Curve") 20% ~ 90% RH non-condensing											
ENVIRONMENT	STORAGE TEMP., HUMIDITY													
	TEMP. COEFFICIENT	±0.03% / °C (0~40°C)												
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes												
	SAFETY STANDARDS													
	WITHSTAND VOLTAGE	I/P-O/P:4242VDC												
SAFETY &	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH												
EMC (Note. 8)		Parameter		Standard										
, ,	EMC EMISSION	Conducted emis	ssion	FCC PART 1	FCC PART 15 / CISPR22, CAN ICES-3(B)/NMB-3(B) Class B									
		Radiated emission FCC PART 15 / CISPR22, CAN ICES-3(B)/NMB-3(B) Class B												
	LIFE	3 years : 100% load 40°C, 12hours / day												
OTHERS	MTBF	/IL-HDBK-217F(
OTTLEKS	DIMENSION	93.5*35*51.5mm (L*W*H)												
	PACKING	250g; 60pcs / 17kg / CARTON												
CONNECTOR	PLUG	See page 4~5; Other type available by customer requested												
	CABLE See page 4~5; Other type available by customer requested													
	1.All parameters are specified at 115VAC input, rated load, 25°C 70% RH ambient.													
		•			2.DC voltage: The output voltage set at point measure by plug terminal & 50% load.									
	2.DC voltage: The output volt	age set at point		-										
	2.DC voltage: The output volt 3.Ripple & noise are measure	age set at point ed at 20MHz by	using a 12" twis	ted pair termina		& 47uf capacitor	r.							
	2.DC voltage: The output volt 3.Ripple & noise are measure 4.Tolerance: includes set up	age set at point ed at 20MHz by colerance, line re	using a 12" twis	egulation.		& 47uf capacitor	r.							
NOTE	2.DC voltage: The output volt 3.Ripple & noise are measure 4.Tolerance: includes set up to 5.Line regulation is measured	age set at point ed at 20MHz by colerance, line re I from low line to	using a 12" twis gulation, load re high line at rate	egulation.		& 47uf capacito	r.							
NOTE	2.DC voltage: The output volt 3.Ripple & noise are measure 4.Tolerance: includes set up t 5.Line regulation is measure 6.Load regulation is measure	age set at point and at 20MHz by colerance, line red from low line to d from 10% to 1	using a 12" twis gulation, load re high line at rate 00% rated load	egulation. ed load.	ted with a 0.1uf	·	r.							
NOTE	2.DC voltage: The output volt 3.Ripple & noise are measure 4.Tolerance: includes set up to 5.Line regulation is measured	age set at point and at 20MHz by colerance, line red from low line to d from 10% to 1	using a 12" twis gulation, load re high line at rate 00% rated load	egulation. ed load.	ted with a 0.1uf	·	r.							
NOTE	2.DC voltage: The output volt 3.Ripple & noise are measure 4.Tolerance: includes set up t 5.Line regulation is measure 6.Load regulation is measure	age set at point ad at 20MHz by colerance, line re from low line to d from 10% to 1 nder low input vo	using a 12" twis gulation, load re high line at rate 00% rated load oltage. Please cl	egulation. ed load. heck the derating	ted with a 0.1uf	e details.		em complies with	n the					
NOTE	2.DC voltage: The output volt 3.Ripple & noise are measure 4.Tolerance: includes set up to 5.Line regulation is measure 6.Load regulation is measure 7.Derating may be needed up	age set at point ad at 20MHz by colerance, line re I from low line to d from 10% to 1 ader low input voered as an indep	using a 12" twis gulation, load re high line at rate 00% rated load oltage. Please cl pendent unit, bu	eted pair terminal egulation. Bed load. Bed load. Bed the derating the final equiprical equipric	ted with a 0.1uf g curve for more	e details. o re-confirm that	the whole sys	•	n the					
NOTE	2.DC voltage: The output volt 3.Ripple & noise are measure 4.Tolerance: includes set up of 5.Line regulation is measure 6.Load regulation is measure 7.Derating may be needed up 8.The power supply is consider	age set at point and at 20MHz by colerance, line real from low line to differ from 10% to 1 ander low input votered as an indepice on how to pe	using a 12" twis gulation, load re high line at rate 00% rated load oltage. Please cl pendent unit, bu	eted pair terminal egulation. Bed load. Bed load. Bed the derating the final equiprical equipric	ted with a 0.1uf g curve for more	e details. o re-confirm that	the whole sys	•	n the					



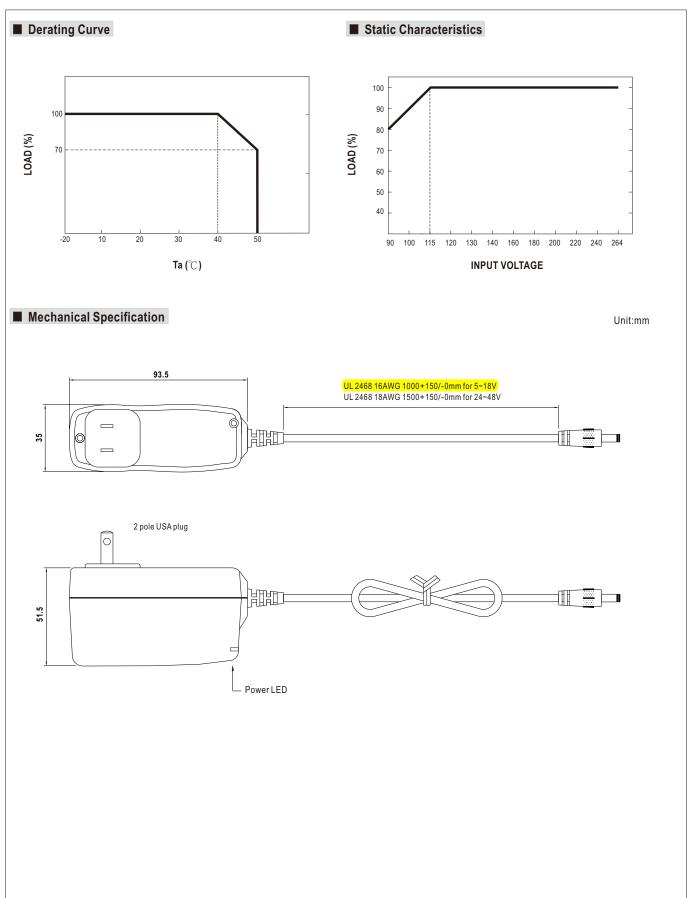

60W AC-DC High Reliability Slim Wall-mounted Adaptor

■ DC output plug

O Standard plug: P1J

Unit:mm

	P1J		Pin Assignment
W	5.5	11±0.5mm	⊕ -c*+*
	2.1		Outside ⊖—⊕ Inside

- O DC plug changeable through:
 - (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
 - (2) Quick adapter accessory (sold separately without MOQ)

Please refer to below table and online selection guide: https://www.meanwell.com/upload/pdf/DC_plug.pdf

Example quick adapter accessory:







Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style			Type No.	Α	В	С	Quick Adapter	
			туре но.	OD	ID	L	Accessory	
		- C	P1I	5.5	2.1	9.5		
		(Straight)	P1L	5.5	2.5	9.5		
-	Α_		P1M	5.5	2.5	11.0	A!	
	В	C	P1IR	5.5	2.1	9.5	Available	
-			P1JR	5.5	2.1	11.0	(Current rating: 7.5A max.)	
			P1LR	5.5	2.5	9.5		
		(Right-angled)	P1MR	5.5	2.5	11.0		
	Type No.	Α	В	С				
Barrel Style			Type No.	OD	ID	L		
		. C .	P2I	5.5	2.1	9.5		
	٨	(Straight)	P2J	5.5	2.1	11.0		
			P2L	5.5	2.5	9.5	None	
			P2M	5.5	2.5	11.0	110110	
	<u> </u>	C	P2IR	5.5	2.1	9.5		
			P2JR	5.5	2.1	11.0		
			P2LR	5.5	2.5	9.5		
		(Right-angled)	P2MR	5.5	2.5	11.0		
Lock Style			Type No.	Α	В	С		
				OD	ID	L		
be.	Α.	Floating Locking C-	P2S(S761K)	5.53	2.03	12.06	None	
	В		P2K(761K)	5.53	2.54	12.06	None	
-			P2C(S760K)	5.53	2.03	9.52		
		SWITCHCRAFT original or equivalent	P2D(760K)	5.53	2.54	9.52		
Min. Pin Style			Type No.	Α	В	С		
			турстчо.	OD	ID	L		
	A	C	P3A	2.35	0.7	11.0	Available	
	B B		P3B	4.0	1.7	11.0	(Current rating: 5A max.)	
	→ - □	EIAJ equivalent	P3C	4.75	1.7	11.0		





Center Pin Style	Type No.	A OD	B ID	C	D Center Pin	Quick Adapter Accessory	
A. C	P4A	5.5	3.4	11.0	1.0		
	P4B	6.5	4.4	11.0	1.4	Available	
		7.4				(Current rating: 7.5A max.)	
EIAJ equivalent	P4C			5.1 11.0 0.6			
Min. DIN 3 Pin with Lock (male)	Type No.	Pin Assignment PIN No. Output					
_		1	١.	•		Available (Current rating: 7.5A max.)	
	R6B	-		+Vo			
3		2		-Vo			
KYCON KPPX-3P equivalent		3	<u> </u>	+Vo			
Min. DIN 4 Pin with Lock (male)	Type No.			gnment			
2 (7.	PIN No	١.	Output		Available (Current rating: 7.5A max.)	
2 3 Ling 中 日 日 日 日 日 日 日 日 日 日 日 日 日 日 日 日 日 日	R7B	1		+Vo -Vo			
		3		-vo -Vo +Vo			
KYCON KPPX-4P equivalent		4					
		Pin Assignment					
Min. DIN 4 Pin with Lock (female)	Type No.		PIN No. Output				
	R7BF	1		+Vo		None	
2 3 Landing La		2		-Vo		None	
		3		-Vo			
KYCON KPJX-CM-4S equivalent		4		+Vo			
Stripped and tinned leads	Type No.	Pin Assignment					
Outpped and inflied leads		PIN No).	Outpu	ıt		
1	by customer	1 (Ribbed White)	or	+Vo		None	
L1 Length of Land L1 by request (MW's standard length, L: <u>25</u> mm, L1: <u>10</u> mm)		2 (Letter Black)		-Vo			

■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html